

GEX\_S

"GEX-FZ-1G": High precision laboratory balance, for ATEX zone 0



High precision laboratory balance for hazardous areas. Protection rating II 1G Ex ia II B T4 Ga for gas.

CE-M approved (OIML R-76 / EN 45501).

---

**CAPACITIES (g):** 620, 6200, 15000.

---

Working in cooperation with:

**P.R.S. TORFBUD DAWID SZOPA**  
UL.KOPERNIKA 6 - 41500 - CHORZOW - POLAND  
Tel. 0048-322413522 Fax. 0048-322413522  
torfbud@wagielektroniczne.com.pl

The best solution  
for advanced industrial  
applications

## MAIN FEATURES

- 27-key numeric and functional waterproof keyboard.
- 9-digit 25 mm LCD display.
- IP65 stainless steel structure.
- Dimensions 294 x 352 x 570 mm.
- Weighing sensor with tuning fork technology.
- Stainless steel plate, dimensions:
  - GEX-FZ620-1G, Ø 140 mm;
  - GEX-FZ6200-1G e GEX-FZ15000-1G, 190×190 mm;
- RS232 serial output incorporated in the power supply in safe area.
- 100 - 240VAC power supply in safe area, with RS232 serial port.
- 5 m cable between power supply and weight indicator.
- 1 m cable between platform and weight indicator.
- 2.5 m power cable.
- Version approved for CE-M II legal-for-trade use.

## AVAILABLE FUNCTIONS

- Zeroing;
- Semiautomatic tare;
- Preset tare;
- Tolerance check;
- Totalization in loading and unloading;
- Up to 100 storable tares;
- Bar graph display in relation to flow rate;
- 6 configurable serial communication protocols, sending the string continuously, at stability, on demand or at the press of a key;
- 5 selectable weighing filters;
- Zero tracking.

## WEIGHING MODES

- Weighing in grams;
- Percentage weighing for formulation and recipe dosing;
- Customized coefficient for liquid weighing and grammage.

## MAIN CERTIFICATIONS

- II 1G Ex ia II B T4 Ga
- OIML R76

*Manuals, safety instructions and ATEX EU declaration of conformity in English language.*

DETAIL 1




DETAIL 2



DETAIL 3




DETAIL 4

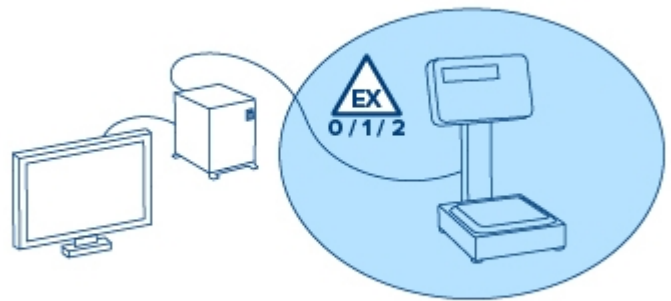

## VERSIONS

### Available versions

Codice	Classe	Piatto Max (mm)	Max (g)	d (g)	 (g)*	Linearità (g) +/-	Ripetibilità (g)
GEX-FZ620-1G	II	Ø 140	620	0.001	0.01	0.002	0.001
GEX-FZ6200-1G	II	190 x 190	6200	0.01	0.1	0.02	0.01
GEX-FZ15000-1G	II	190 x 190	15000	0.1	1	0.2	0.1



www.diniargeo.com

“YOUR WORLDWIDE PARTNER FOR WEIGHING”

DINI ARGEO  
FRANCE sarl  
France

DINI ARGEO  
GMBH  
Germany

DINI ARGEO  
UK Ltd  
United Kingdom

DINI ARGEO WEIGHING  
INSTRUMENTS Ltd  
China

DINI ARGEO  
OCEANIA  
Australia



**COMPANY HEADQUARTERS**

Via Della Fisica, 20  
41042 Spezzano di Fiorano - Modena - Italy  
Tel. +39.0536 843418

**P.R.S. TORFBUD DAWID SZOPA**

UL.KOPERNIKA 6 - 41500 - CHORZOW - POLAND

Tel. 0048-322413522 Fax. 0048-322413522

torfbud@wagielektroniczne.com.pl

SALES AND TECHNICAL ASSISTANCE SERVICE